

ICUBE-1: First Step towards Developing an Experimental Pico-satellite at Institute of Space Technology

Rehan Mahmood, Khurram Khurshid, Adnan Zafar, Qamar ul Islam

Communication Systems Engineering Department

Institute of Space Technology

Islamabad, Pakistan

Email: rehan, khurram.khurshid, adnan.zafar, qamar.islam @ist.edu.pk

Abstract—Generally launching satellites for the purpose of research and technology demonstration largely remained with the national space agencies as huge funding requirements inhibited the initiation of such projects at university level. It was this idea of providing, at university level, cheap access to space that encouraged the design of miniaturized versions of satellites for research purposes. Specifications of CubeSat, a pico-satellite, were defined to provide easy access to space for educational and research institutions. The improvement in engineering technologies and miniaturization of physical components has enabled design, development and launch of such small low-cost spacecrafts and to date, more than 60 universities, institutions and research organizations have taken part in CubeSat program since its inception in 1999 [1]. Institute of Space Technology (IST) adopted the concept of CubeSat development by initiating the satellite program, ICUBE. ICUBE is the premier student satellite program of any educational institution/university in Pakistan. The first satellite of this program is named ICUBE-1. Successful launch of ICUBE-1 and establishing its communication link with the ground are the primary goals of this mission. The satellite has a passive attitude control system and will carry a CMOS camera for experimental purposes. In this paper, we will discuss in detail the design philosophy of ICUBE-1, followed by the preliminary design and analysis of all its subsystems. The required testing and technical support facilities are discussed before the final conclusions.

The secondary objectives included the proper deployment and safety of the CubeSats. Development of P-POD also reduced the concern levels of the launch providers as they now knew in advance about the secondary payload interface. Since its initial design, P-POD has had several improvements; thanks to the feedbacks provided by its users. P-POD is constructed from high strength, low cost aluminium 7075-T73 and can carry up to three 1U (1-unit) CubeSats, which are deployed by opening a spring loaded door as commanded by the ground station [2]. After deployment from P-POD, the CubeSats are separated in space by the separation springs located between the CubeSat structures [1]. The launch opportunities are generally coordinated by the CubeSat organization and CalPoly [3] along with the recent addition of NASA's CubeSat Launch Initiative [4] and ISIS-Innovative Solutions in Space, Netherlands [5].

IST, with the same philosophy, initiated the small low-cost spacecraft development program in 2009. The first satellite of this program, ICUBE-1, is scheduled to be launched by the 4th quarter of 2011. ICUBE-1 will carry an experimental imaging payload having a small, low resolution CMOS camera, capable of taking continental scale images of Earth. A Telemetry, Tracking and Command (TT&C) ground station has already been developed at IST to fulfil the communication requirements with ICUBE-1. The development of other required facilities including a clean room, thermal vacuum chamber and vibration test facility are also under way.

1 INTRODUCTION

CubeSat became a de-facto picosatellite standard with an objective to educate and involve students in spacecraft design, development and operational phases. Stanford's Space Systems Development Laboratory (SSDL) and California Polytechnic State University's Multidisciplinary Space Technology Laboratory (MSTL) initiated the CubeSat concept in 1999 [1] when they defined certain specifications for a CubeSat. These small satellites were supposed to be launched as a piggy-back along with the primary payload of a launch vehicle (LV), therefore, certain specifications regarding a common interface between the spacecraft and the launch vehicle were developed to facilitate the launch process of the CubeSats as secondary payloads.

The Poly-Picosatellite Orbital Deployer (P-POD) was developed by CalPoly [2] whose primary objectives were to ensure the safety of launch vehicle as well as its primary

2 ICUBE

The ICUBE project is initiated by IST with an objective to provide students the skills and experiences required to build pico and nano satellites. ICUBE follows the learn-by-doing philosophy of CubeSat. The primary mission objective of ICUBE is to design, develop, integrate and launch picosatellite standard CubeSat. The secondary objectives are the communication, in-orbit operation and collection of the payload data. The experience and knowledge acquired during the development and operation of ICUBE-1 would eventually be utilized to develop future CubeSats with more complex subsystems and science missions. The data obtained from several subsystems would be utilized as a baseline to develop better subsystems. In the future, this program will allow the graduates of IST to be involved in all phases of spacecraft development, launch and operation.

3 PRELIMINARY 1ST ORDER DESIGN.

Orbit: ICUBE-1 is expected to be launched in a low Earth, circular, Sun-Synchronous orbit (SSO). The orbital would be 600-700 km but for the sake of analysis, orbital altitude of 650km is assumed. The SSO is chosen primarily to ensure access to ICUBE-1 from every place on the Earth.

The inclination of ICUBE-1 is approximately 98° according to the chosen parameters. The orbital period of ICUBE-1 is 97.72 minutes with maximum eclipse time of 35.37 minutes. Dawn-dusk and noon-midnight SSO are the two extreme cases from the power generation and thermal point of view. Both worst-case situations are used for the thermal and power analysis of ICUBE-1. The ground track of the ICUBE-1 is obtained by STK simulation as shown in Figure 1. ICUBE-1 is in contact with the IST ground station 4.5 times a day with a total communication window of approximately 54 minutes every day.

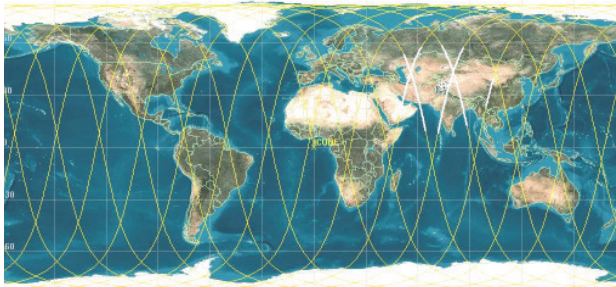


Figure 1 – ICUBE-1 expected ground track

Operational modes: The functional operation of ICUBE-1 is divided into five modes which are emergency, power saving, normal, payload and transmit mode. These modes can be switched automatically by an on-board computer (OBC) depending upon requirements. The modes can also be switched manually by tele-command from the ground operation. There is special mode called deployment sequence executed immediately after deployment.

The deployment sequence and initialization guidelines are provided in the CubeSat specifications [1]. After deployment from P-POD, the deployment switch is released and the batteries are connected to the system bus. A 15-30 minute delay is necessary before the deployment of any structure, such as antenna or boom, to ensure enough separation between the CubeSats sharing the same P-POD. After successful deployment of antennas, ICUBE-1 will enter the power saving. In power saving mode, all the subsystems of ICUBE-1 will be powered-off except the on-board computer. When the available power reaches the required threshold, ICUBE-1 will be switched to normal mode, while performing the routine housekeeping tasks as well as transmission of a beacon signal at predetermined intervals.

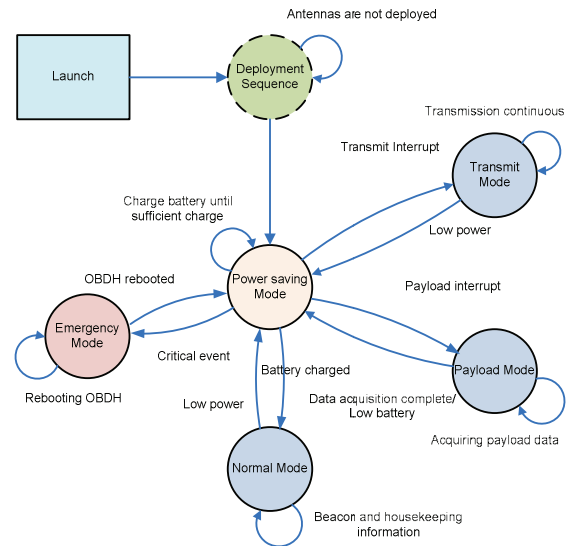


Figure 2 – Operational modes of ICUBE-1

ICUBE-1 will be switched to emergency mode in case of any unwanted event and anomaly detection. In the payload mode, ICUBE-1 will perform payload related tasks such as image acquisition, compression and transfer to the storage memory. All the payload data and housekeeping information stored in the on-board memory will be transferred to the ground station. ICUBE-1 will operate in transmitting mode during contact with the ground station. It will also accept commands from the ground station and will act accordingly. The flow diagram of all the operational modes of ICUBE-1 is given in Figure 2.

4 ICUBE-1 SUBSYSTEMS

ICUBE-1 is divided into several subsystems based on functionality. Each subsystem is being developed independently and the whole system will be integrated later using common predefined electrical, mechanical and data interfaces. The subsystems are discussed in detail below.

Structure: Structure dimensional requirements are imposed by the CubeSat Design specifications [1]. The 1U CubeSat must be a 10cm cube with a maximum mass of 1.33kg. The 2U and 3U dimensions are also possible while maintaining the two dimensions constant and varying the third dimension.

ICUBE-1 will use the space-proven 1U solid-wall structure from Pumpkin Inc. shown in Figure 3. The structure conforms to all the design requirements of CubeSat. The bulk material used in the structure is aluminium 5052-H32 and the feet are machined from aluminium 6061-T6. The rail surfaces, which are in contact with the P-POD, are hard anodized to provide smooth motion and prevent the satellite from cold welding within the P-POD. The rest of the structure is alodined and acts as faraday's cage to protect ICUBE-1 from external electric fields. A Remove Before Flight (RBF) pin is also provided with the kit to keep the CubeSat inactive during transportation and launch. One deployment switch and two separation springs are present according to the CubeSat

Design Specifications. The Pumpkin's CubeSat structure has good flight heritage [7].



Figure 3 - ICUBE-1 IU structure

Power: Due to the small physical dimensions of CubeSat, the power generation capability always remains limited. With the advancement in solar cell manufacturing technology, it is possible to fabricate more than 30% efficient Ultra Triple Junction Cells (UTJ) which is almost double the efficiency of the conventional Silicon solar cells. ICUBE-1 will use Advanced Triple Junction (ATJ) cells. Five faces of ICUBE-1 have solar panels consisting of two solar cells on each panel capable of delivering approximately 2W of power. Each cell has a dimension of 40mm x 80mm with an efficiency of more than 27.5% @ 25°C in the BOL.

The power board is provided by Clyde-Space shown in Figure 4. It has a good flight heritage [7] and is capable of providing +3.3V and +5V regulated power bus along with the unregulated battery bus. The power supply unit is also compatible with the on-board computer and the other subsystems of ICUBE-1. The power board is more than 90% efficient and has over current and under voltage protection [5]. It has three battery charge regulators (BCR), each capable of handling 3W of power. The telemetry of the power supply unit consists of battery and bus voltages and currents along with the temperature of the solar panels and batteries. The telemetry data is transferred to the on-board computer via I²C data bus. The power board is also equipped with Maximum Power Point Tracking (MPPT) to keep the operating point of the power subsystem at an optimal level.

Two rechargeable lithium-ion polymer batteries are connected in series with the power board to provide necessary storage capacity during eclipses. Each battery has a capacity of 1500mAh at 3.7V. Lithium polymer batteries are popular for their high storage density and greater life cycle degradation rate. The batteries are charged/ discharged at C/2 rate using the taper charge method i.e. they can provide approximately 5W of continuous power for two hours when fully charged. Furthermore, each battery is provided with a heater which can be turned on and off by sending commands via I²C bus which

keeps the batteries temperature within the operating range for optimum performance.

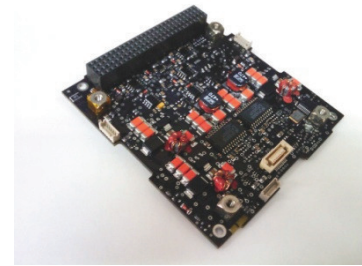


Figure 4 - Power Board of ICUBE-1

Communication: Communication subsystem is one of the most critical subsystems of ICUBE-1. Without reliable communication, a satellite is of no use. In ICUBE-1, amateur frequency bands would be used for uplink and downlink communication. The use of amateur frequency band is open to amateurs and hobbyists and has relatively limited coordination requirements. Also, a number of ground stations are already using this frequency band which makes it possible for ICUBE-1 to communicate with other ground stations. The exact uplink and downlink frequencies will be finalized after coordination with International Amateur Radio Union (IARU). ICUBE-1 will use VHF range for uplink and UHF range for the downlink. Audio Frequency Shift Keying (AFSK) will be used to send commands to the ICUBE-1 in uplink at a data rate of 1200bps. BPSK with data rate of 1200 bps will be used in the downlink to receive the telemetry and payload data from the satellite. The communication system is also capable of transmitting a CW beacon periodically carrying telemetry data in Morse code format. It is used not only to easily identify the satellite but also to transmit data regarding the basic satellite health.

The transceiver used will have the output power of approximately 300mW. AX25 protocol will be used as a data link protocol for packet communication. Two antennas, one monopole and one dipole will be used for uplink and downlink respectively. The antennas are stowed during launch and will be deployed according to the launch sequence.

On-Board Computer: The on-board computer (OBC) of ICUBE-1 is FM430 shown in Figure 5 will be provided along with the CubeSat kit by Pumpkin Inc. The processing unit of the OBC is an ultra low power 16 bit microcontroller from Texas Instruments, MSP430F1612. This microcontroller has very low power consumption and the whole flight board only consumes a maximum of 2mA current. The microcontroller has 55KB of flash and 5KB of RAM. 12 bit ADC and DAC is supported by this microcontroller. A SD card slot is also available for mass data storage up to 2GB. Three different data communication buses I²C, SPI and USART are available for data transfer between different subsystems. I²C will be mainly used for inter-subsystem data transfer i.e. for sending commands to various subsystems and to gather housekeeping

information from different sensors. The electrical connections between the different subsystems are made using PC104 form factor bus which reduces the harnesses requirements in limited volume of CubeSat. The flight board FM430 has a good flight heritage and has already been used in several successful CubeSat missions [7].

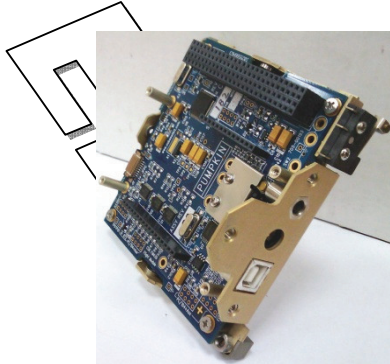


Figure 5 – On Board Computer of ICUBE-1, FM430

Attitude Control Subsystem: ICUBE-1 being the first spacecraft design project of IST will use robust design procedures to increase its reliability. Therefore, a passive attitude control system will be used in the satellite instead of a complex active attitude determination and control system. Passive attitude control systems are popular in low cost small spacecrafts due to design simplification. In relatively large low cost satellites, the gravity gradient passive attitude control system is used due to the possibility of deploying large structures to create the gravity differential. However, in small spacecrafts, passive control is achieved by using a permanent magnet that aligns the spacecraft with the Earth's magnetic field.

ICUBE-1 has one permanent magnet and two hysteresis rods for passive attitude control system. The permanent magnet is attached to one axis of ICUBE-1 and the hysteresis rods are held perpendicular to the permanent magnet as shown in the Figure 6. The axis carrying the permanent magnet will lock ICUBE-1 with the magnetic field of the Earth however the satellite is free to rotate around this axis. Thus the hysteresis rods are placed perpendicular to each other and to the permanent magnet to dampen and oppose these rotations. The limitation of this attitude control system is that the ICUBE-1 will change its orientation as it travels from the South Pole to the North Pole and vice versa according to the Earth magnetic line of forces as shown in Figure 7. Due to this behaviour, it will be possible to take images of only one hemisphere of the earth.

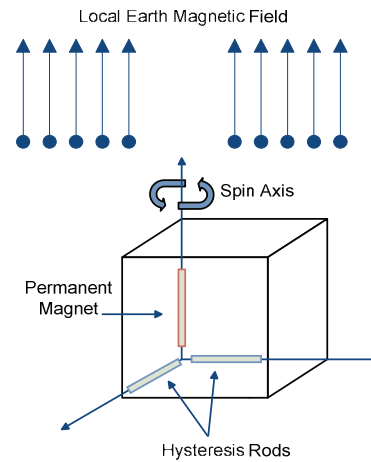


Figure 6 – Passive attitude control system

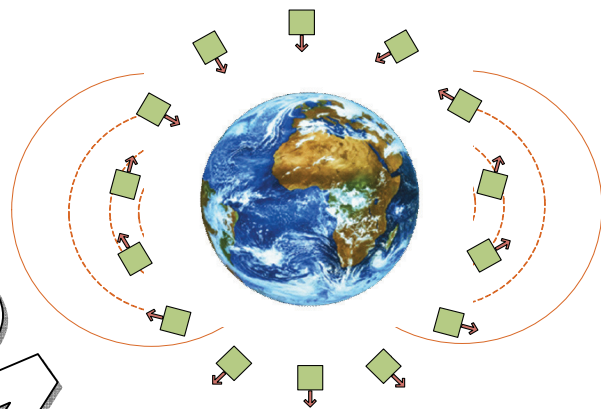


Figure 7 – Passive attitude control system

Payload: As discussed before, the primary mission objective of ICUBE-1 project is to successfully launch and operate the satellite with fully functional telemetry and tele-command links. The secondary mission objective is to take images of the Earth and store them in the on-board memory card for transmission to ground. For that purpose, a low resolution CMOS imaging module C3188A will be used in ICUBE-1. The module is shown in Figure 8. It consists of an Omnivision OV7620 CMOS colour sensor. The resolution of the sensor is 664 x 492 pixels with a pixel size of 7.6µm. The camera uses 1/3" lens with a focal length of 6mm. Due to the harsh environment of the space, special lens may be required for the camera. If we consider an altitude of 650km, each pixel transforms into a ground area of 824m x 824m as shown in Figure 9.



Figure 8 – C3188A camera module

Each raw image will take 980,064 bits of data for storage. However, due to the low data rate downlink and limited communication window, the image will first be compressed using the jpeg compression algorithm. The compression of the image is achieved using a separate microcontroller, other than the on-board computer. The data will later be transferred to the OBDH memory or ground station according to the requirement.

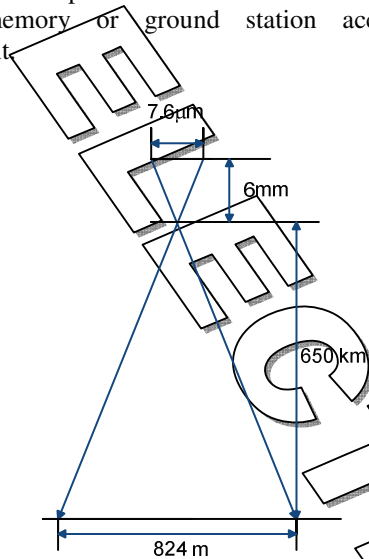


Figure 9 – Ground resolution of OV7620 CMOS sensor

Antenna Deployment Mechanism: ICUBE-1 will use a half-wave dipole antenna for the downlink and quarter-wave monopole for the uplink. The dimension of the dipole antenna is approximately 35cm's and that of the monopole is approximately 50cm's. Due to dimensional constraints of CubeSats, both the antennas will be stowed so that the external dimension will not exceed 6.5mm from the outer surface of the ICUBE-1. The antennas would be released by melting a nylon wire using some heating material. The deployment mechanism is in the design process in consultancy with ISIS-Invoative Soutlions in Space, Neitherlands.

5 ENGINEERING SUPPORT FACILITIES

To successfully design, develop and integrate ICUBE-1, special engineering and test facilities are necessary. Proper testing procedures are defined to assure the quality of the spacecraft and its components [9]. The qualification test of a spacecraft and its components certifies that all the spacecraft components and systems are functional and survivable during the launch and in the space environment over the course of its lifetime. These tests include vibration, thermal-vacuum and also electromagnetic compatibility test which is sometimes required. Furthermore, development of a ground station to properly communicate with the spacecraft is also of utmost importance. IST is in the process of developing and upgrading its engineering support facilities required for ICUBE project. It is also planned to provide most of the test facilities within IST. However support and test facilities available at other institutions and organization will also be utilized.

Ground Station: IST has recently developed a satellite ground station to support its space development program. The ground station has the capability of receiving data from satellites autonomously. The ground station is also compatible with GENSO and in future, after the release of the GENSO public software, IST will also participate in this educational network of ground stations to achieve global coverage.

The ground station can transmit and receive in VHF and UHF bands with separate crossed Yagi antennas for both horizontal and vertical polarization. A small dish is also mounted for the reception of S-Band signals. The Azimuth and Elevation rotor assembly control the orientation of the antennas through computer tracking software. The satellite earth station transceiver is connected with the antennas via coaxial cable which is capable of generating 100W of power. It is specially designed for satellite operations. Several TNC's are connected with the transceiver to modulate / demodulate and packetizing the digital data. The earth station is capable of automatically tracking the satellites.

Clean Room: Spacecrafts are developed in a clean environment to avoid any captured dust particles and surface contamination especially on the electro-optical components such as solar cells. This development process enhances the reliability of the spacecraft. IST is in the process of developing a class 10,000 clean room. Clean rooms available at other institutions will be utilized until the facilities are available in-house.

Thermal Vacuum Chamber: The thermal requirements of spacecraft are guided by its thermal subsystem design and its orbit of operation. All the components and subsystems must survive extreme temperature conditions to ensure proper working of the spacecraft. To test and qualify the components according to the required thermal environment, the components and the whole spacecraft will be mounted in a thermal-vacuum chamber with controlled thermal and vacuum environment. The spacecraft is exposed to the specified thermal cycle and tested according to the requirement [10].

Outgassing is the slow release of gas that is trapped in the material, under very low pressure conditions such as in vacuum. Outgassing can contaminate optical surfaces such as solar cells and thus it is highly desirable to use the low-outgassing materials in any spacecraft. Outgassing can increase in high temperature. Thermal bake out is thus required to identify the outgassing material and also to remove any trapped gases during the bake out not only at the component level but also at the integration level.

Shake Table: All the subsystems and components of ICUBE-1 must survive the transportation and launch process. Launch vehicle produces extreme vibrations during its ascent and causes acceleration of several g's. The structure of ICUBE-1 must be capable of surviving these extreme shocks and vibrations and must remain intact not only for the success of the mission itself but also to ensure the safety of other payloads and the launch vehicle. The vibrations may range

from 20Hz to 2000 Hz [⁹] depending on the launch vehicle. The spacecraft and the components are exposed to the specified vibration and acceleration using shaker drives along the entire three axis. In a similar way, ICUBE-1 will require the qualification and acceptance vibration test.

Helmholtz Coil: ICUBE-1 has a passive attitude control which includes a permanent magnet with two hysteresis rods. A uniform magnetic field is required to test the magnet as well as the hysteresis rods. Such a uniform magnetic field can be provided by using Helmholtz coil. IST has the Helmholtz coil facility and the attitude control system will be tested in this facility.

Launch: The launch is an integral part of the spacecraft mission. Generally, the small spacecrafts are launched as a piggy-back along with the primary payload. Moreover, the orbital parameters are also imposed by the primary payload and the other payloads have to modify their missions according to these constraints. Currently, due to more participation of world-wide institutions in the CubeSat program, CubeSat organisation has started coordinating launches for CubeSats. Some third parties are also coordinating launch process for CubeSats. This reduces the overall launch and procedural cost, leaving only the task of spacecraft development to the mission designers. IST is also in contact with some of the launch coordinators and providers to secure a reliable and low cost launch of ICUBE-1.

6 CONCLUSIONS

In this paper, the initial subsystem analysis and preliminary design of ICUBE-1 has been discussed. The educational value expected to be achieved during this project would become a baseline for designing future space missions in the institute. The design of ICUBE-1 focuses on the use of already space-proven components and excessive testing of the COTS components. The preliminary thermal analysis and power production at the system level have been accomplished. The orbital attitude and the expected environmental analysis have also been completed. A preliminary engineering model of ICUBE-1 is being designed using these simulation parameters and analyses results and it would ultimately be followed by

the development and integration of the flight model. The development of the flight model is expected to be completed by mid 2011. The in-house development facilities will also be identified and developed for the future space missions.

ACKNOWLEDGMENT

We would like to thank the IST management especially the Vice Chancellor for initiating the ICUBE program and supporting the development of first student satellite.

REFERENCES

- [1] The CubeSat Program, "CubeSat Design Specification," California Polytechnic State University, San Luis Obispo, 2009.
- [2] The CubeSat Program, "Poly Picosatellite Orbital Deployer Mk III," California Polytechnic State University, San Luis Obispo, 2007.
- [3] Mission Statement, CubeSat organization website <http://www.cubesat.org>
- [4] NASA Website http://www.nasa.gov/directorates/somd/home/CubeSats_initiative.html
- [5] ISIS Netherlands, Website <http://www.isispace.nl/>
- [6] Armen Toorian, Ken Diaz, and Simon Lee, "The CubeSat Approach to Space Access", IEEE aerospace conference, March 1-8, 2008
- [7] CubeSat Kit Website <http://www.cubesatkit.com>
- [8] NASA Website http://science.nasa.gov/science-news/science-at-nasa/2009/29may_noaaprediction/
- [9] James R Wertz and Wiley J Larson, Space Mission Analysis and Design, 3rd ed.
- [10] "DNEPR, Safety Compliance Requirements", 2004.
- [11] "ITU-SATI: Istanbul Technical University Student Pico-Satellite Program", 3rd international conference on Recent Advances in Space Technologies, 2007.